
MAX485

MAX485 TTL TO RS485 Converter Module

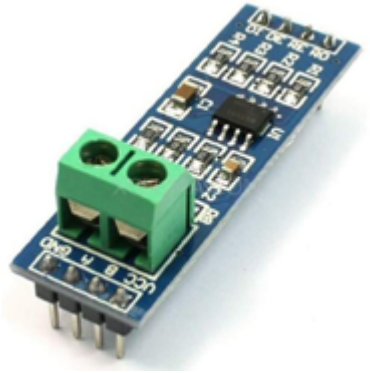

• On-board MAX485 chip, A low power consumption for the RS-485 communication, slew-rate limited transceiver.
• A low power consumption for the RS-485 communication
• Onboard then 5.08 (mm) pitch 2P terminal to facilitate RS-485 communication wiring.
• Slew-rate limited transceiver
• All pins of the chip have been lead to can be controlled through the microcontroller.
• Convenient RS-485 communication wiring
• Multiple Units can be connected to the same RS-485 bus wiring.
• All Chip pins are brought out for proper controls