
PL2303

PL2303HX USB to TTL STC

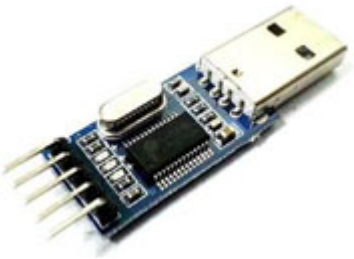

• This is PL2303 PL2303HX USB To TTL(Serial) Converter Module – 5 Pin. Adopt imported controller RS232 TTL, which can stabilize the flash with high-speed 500mA self-recovery fuse for protection.
• Adopt imported controller PL2303HX, which can stabilize the flash with high speed
• 500mA self-recovery fuse for protection
• Two data transmission indicator can monitor data transfer status in real time
• Reserve 3.3V and 5V pin interface, easy for the DDWRT of different voltage system that needs power
• The entire board is coated by the high quality transparent heat-shrinkable sleeve, making the PCB in insulation state from outside,
• so that the board won’t be burnt down by material shortcut.
• Electrostatic package ensures the board will not be damaged before use